



Meaningful Innovation.

WEEE Number: 80133970

INSTRUCTION MANUAL

LED WATERPROOF LAMP FITTING



TECHNICAL DATA

	VT-12017	VT-12035	VT-12049
MODEL	VT-12017	VT-12035	VT-12049
SKU	23391, 23392	23387, 23388	23389, 23390
WATTS	18W	36W	48W
LUMENS	2160 Lm	4320 Lm	5760 Lm
BEAM ANGLE	120°	120°	120°
DF	≥0.7	≥0.9	≥0.9
CRI	≥80	≥80	≥80
INPUT POWER	AC:200-240, 50/60Hz	AC:200-240, 50/60Hz	AC:200-240, 50/60Hz
LIFE SPAN	25,000 Hours	25,000 Hours	25,000 Hours
ON/OFF CYCLE	>15,000 Times	>15,000 Times	>15,000 Times
MAX CONNECTABLE UNITS	20	10	8
DRIVER MA (Input Current)	100mA	200mA	265mA
MATERIAL	PC	PC	PC
DIMENSION	600x68x59mm	1200x68x59mm	1500x68x59mm

INTRODUCTION & WARRANTY


Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 3 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. This product is warranted for manufacturing defects only.



This marking indicates that this product should not be disposed of with other household wastes.









Caution, risk of electric shock.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.

In case of any query/issue with the product, please reach out to us at: support@v-tac.eu
For More products range, inquiry please contact our distributor or nearest dealers.
V-TAC EUROPE LTD. Bulgaria, Plovdiv 4000, bul.L.Karavelow 9B

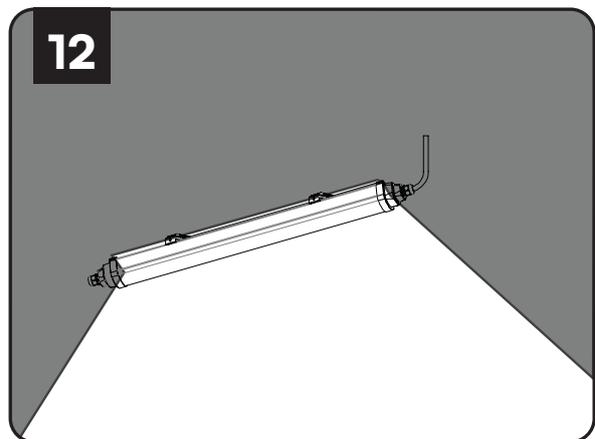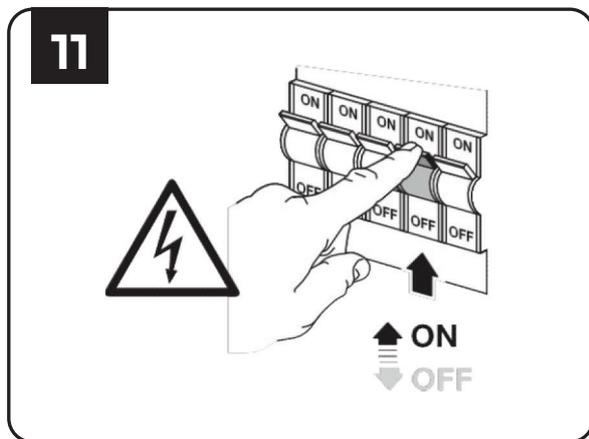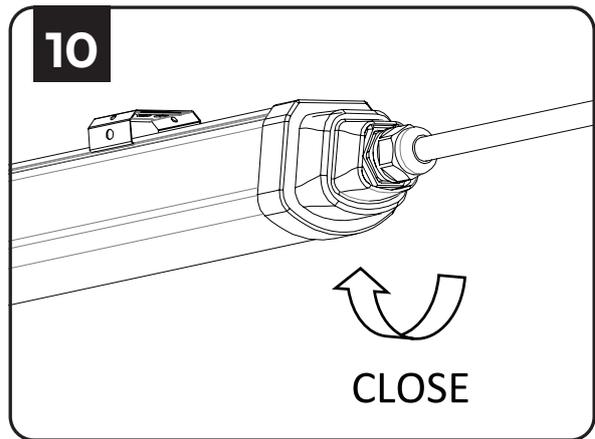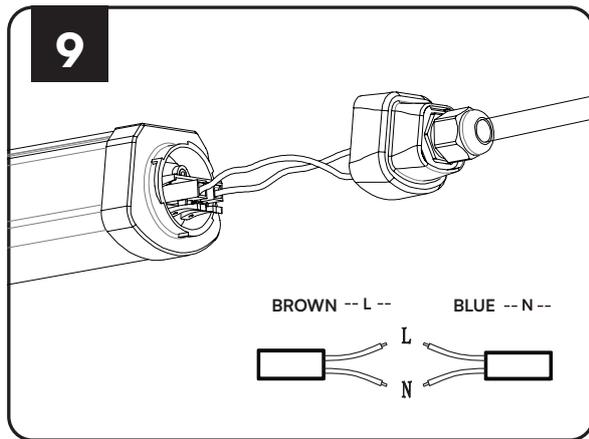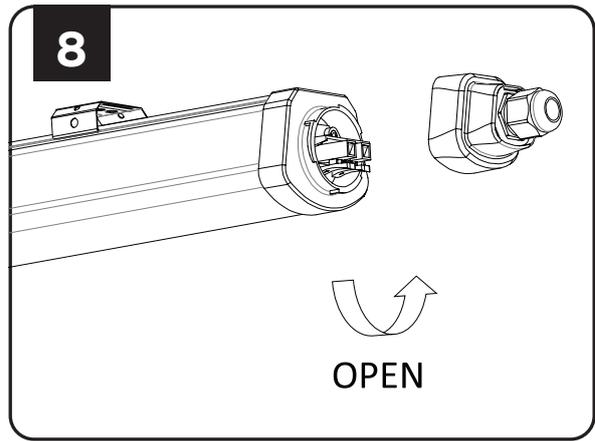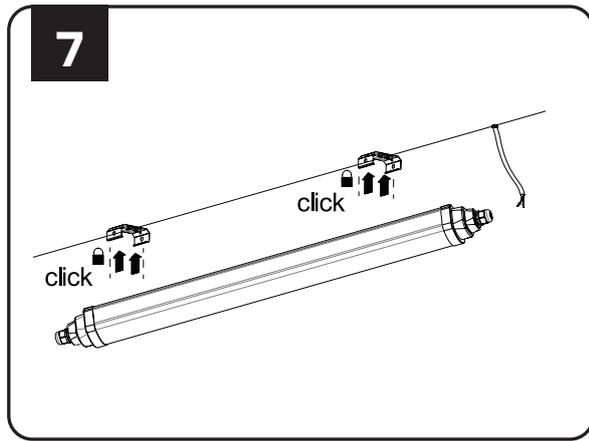

INSTALLATION INSTRUCTIONS

1. Turn off the the power.
2. Mark the proper drilling point as per the chart.
3. Fix the brackets onto the ceiling by offered screws. Open junction box cover of the body with screwdriver.
4. Make sure the cable length is appropriate.
5. Install the lamp to the ceiling clips.
6. Open the right side lid to connect wires.
7. Insert cable through the waterproof connector and wire it into terminal block. Make sure L and N are wired to correct holes. (LIVE = BROWN; NEUTRAL = BLUE)
8. Close the right lid.
9. Turn on the power and test.

RoHS



UK
CA

